



AFRL-RY-WP-TP-2009-1096

**NARROW-BANDWIDTH, SUBNANOSECOND, INFRARED
PULSE GENERATION IN PPLN PUMPED BY A FIBER
AMPLIFIER-MICROCHIP OSCILLATOR (POSTPRINT)**

Matthew D. Cocuzzi, Kenneth L. Schepler, and Peter E. Powers

AFRL/RYPJW

APRIL 2009

Approved for public release; distribution unlimited.

See additional restrictions described on inside pages

STINFO COPY

© 2009 IEEE

**AIR FORCE RESEARCH LABORATORY
SENSORS DIRECTORATE
WRIGHT-PATTERSON AIR FORCE BASE, OH 45433-7320
AIR FORCE MATERIEL COMMAND
UNITED STATES AIR FORCE**

REPORT DOCUMENTATION PAGE					Form Approved OMB No. 0704-0188	
<p>The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.</p>						
1. REPORT DATE (DD-MM-YY) April 2009		2. REPORT TYPE Journal Article Postprint		3. DATES COVERED (From - To) 01 January 2008 – 31 August 2008		
4. TITLE AND SUBTITLE NARROW-BANDWIDTH, SUBNANOSCEOND, INFRARED PULSE GENERATION IN PPLN PUMPED BY A FIBER AMPLIFIER-MICROCHIP OSCILLATOR (POSTPRINT)				5a. CONTRACT NUMBER IN-HOUSE		
				5b. GRANT NUMBER		
				5c. PROGRAM ELEMENT NUMBER 61102F/62204F		
6. AUTHOR(S) Matthew D. Cocuzzi, Kenneth L. Schepler, and Peter E. Powers				5d. PROJECT NUMBER 2003		
				5e. TASK NUMBER 12		
				5f. WORK UNIT NUMBER 20031224		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Electro-Optical Countermeasures Technology Branch (AFRL/RJYW) Electro-Optical Sensor Technology Division Air Force Research Laboratory Sensors Directorate Wright-Patterson Air Force Base OH 45433-7320				8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Air Force Research Laboratory Sensors Directorate Wright-Patterson Air Force Base, OH 45433-7320 Air Force Materiel Command United States Air Force				10. SPONSORING/MONITORING AGENCY ACRONYM(S) AFRL/RJYW		
				11. SPONSORING/MONITORING AGENCY REPORT NUMBER(S) AFRL-RY-WP-TP-2009-1096		
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited.						
13. SUPPLEMENTARY NOTES Published in IEEE Journal of Selected Topics in Quantum Electronics, Vol 15, No. 2, March/April 2009. PAO Case Number and clearance date: 88 ABW-08-0278, 23 September 2008. © 2009 IEEE. The U.S. Government is joint author of the work and has the right to use, modify, reproduce, release, perform, display, or disclose the work.						
14. ABSTRACT Narrow-bandwidth, 0.5 ns IR pulses were achieved in a periodically poled lithium niobate optical parametric generator (PPLN OPG). The OPG was pumped at 7.14 kHz by a Yb-doped fiber amplifier and a microchip Nd:YAG oscillator. Bandwidth was reduced from 3/6 nm to 55 pm using a continuous-wave (CW) 1.5-μm seed beam guided through the fiber amplifier.						
15. SUBJECT TERMS laser tuning, nonlinear optics, optical fiber amplifiers, optical parametric processes						
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT: SAR	18. NUMBER OF PAGES 12	19a. NAME OF RESPONSIBLE PERSON (Monitor) Kenneth L. Schepler	
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified			19b. TELEPHONE NUMBER (Include Area Code) N/A	

Narrow-Bandwidth, Subnanosecond, Infrared Pulse Generation in PPLN Pumped by a Fiber Amplifier–Microchip Oscillator

Matthew D. Cocuzzi, Kenneth L. Schepler, and Peter E. Powers

Abstract—Narrow-bandwidth, 0.5 ns IR pulses were achieved in a periodically poled lithium niobate optical parametric generator (PPLN OPG). The OPG was pumped at 7.14 kHz by a Yb-doped fiber amplifier and a microchip Nd:YAG oscillator. Bandwidth was reduced from 3.6 nm to 55 pm using a continuous-wave (CW) 1.5- μm seed beam guided through the fiber amplifier.

Index Terms—Laser tuning, nonlinear optics, optical fiber amplifiers.

I. INTRODUCTION

PERIODICALLY poled lithium niobate (PPLN) nonlinear devices, such as optical parametric generators (OPGs), have achieved efficient frequency conversion and high peak powers in the mid-IR region, particularly due to the high nonlinearity ($d_{33} = 27 \text{ pm/V}$) [1], noncritical phase matching, and simple fabrication of PPLN. High-peak-power pulsed lasers have been shown to be efficient pump sources for PPLN in the nanosecond and femtosecond regimes [2]–[4], and these sources have been operated in a narrow-bandwidth mode [5]. These PPLN sources have been coupled with compact lasers such as microchip Nd:YAG lasers [6] to make an overall system that is simple and robust. Similarly, robust pump sources include rare-earth-doped fiber lasers, specifically erbium [7], [8] and ytterbium fiber lasers [9], [10], which have been used to pump PPLN and generate tunable mid-IR output.

In this paper, we report efficient generation of 70-pm bandwidth, 0.5 ns pulses in the mid-IR spectral region using OPG in a PPLN crystal pumped by 1064 nm pulses from an Yb-doped fiber amplifier. Our novel device combines the advantages of: 1) using a microchip laser to generate subnanosecond pulses; 2) a robust fiber amplifier for generating significant average power ($>700 \text{ mW}$); 3) use of simple, single-pass OPG in PPLN for frequency conversion to IR wavelengths; and 4) generation of narrow bandwidth using a low-power seed beam. Previous methods of achieving a short-pulsewidth OPG signal typically relied on

large, expensive lasers, active Q-switching, and complex optical resonators. This device uses commercially available, compact, and rugged solid-state components. We have added seeding of the signal beam in the PPLN OPG crystal in a simple and robust manner to achieve narrow-band tunable “eyesafe” 1.5 μm output for spectroscopic applications such as remote sensing. Narrow-bandwidth output was achieved by seeding with a low-power continuous-wave (CW) laser at the signal wavelength using two methods: coaligning the seed beam with the fiber amplifier output before the crystal and guiding the seed beam *through* the fiber amplifier.

This scheme differs from simple modulation of a CW beam because of the high peak powers available. IR signal 1.5 μm pulses with peak powers of 30 kW were achieved. In addition, the PPLN OPG scheme makes high-peak-power idler pulses (2.12–5 μm potentially) available, which are of interest for spectroscopy applications. Additionally, the peak power of the pump pulse was so high that single-pass gain was sufficient to achieve efficient nonlinear conversion, allowing us to use a very simple OPG configuration.

II. EXPERIMENTAL SETUP

The oscillator–amplifier laser system [11] used as our OPG pump was built as shown in Fig. 1. The laser oscillator was a Teem Photonics Nd:YAG microchip laser with 1064 nm, linearly polarized, 7.14 kHz repetition rate, passively Q-switched 0.5 ns pulsewidth, 38 mW average power, and 5.3 μJ pulse energy output. The fiber amplifier was pumped at 915 nm using an EM4, Inc., diode laser. The fiber itself was a Yb³⁺-doped, panda-structure, polarization-maintaining (PM), double-clad fiber manufactured by Liekki and had a 25 μm core diameter and a 248 μm inner cladding diameter. The length of the fiber was 3.56 m. The 915 nm pump power was introduced through the output end of the fiber and the doping was such that 92% of the pump power was absorbed by the fiber. The 1064 nm beam was coupled into the input end of the fiber, as indicated in Fig. 1.

The beam profile characteristics of the 915 nm pump and 1064 nm microchip laser output were measured using the knife-edge technique. This, in turn, enabled us to mode-match both the 915 nm pump and 1064 nm oscillator beams into the fiber. The 1064 nm beam-to-fiber-core coupling efficiency was 55% and the pump beam coupling efficiency was 96%. Damage occurred at 21 GW/cm^2 peak power at the fiber output surface.

Damage was prevented by splicing 400 μm core diameter pure-silica fiber end caps to each end of the fiber [12], [13].

Manuscript received October 1, 2008. Current version published April 8, 2009. This work was supported in part by the U.S. Department of Defense, Air Force Research Laboratory Sensors Directorate, and the Air Force Office of Scientific Research.

M. D. Cocuzzi and K. L. Schepler are with the Air Force Research Laboratory, Wright-Patterson Air Force Base (WPAFB), OH 45433 USA (e-mail: matthew.cocuzzi@wpafb.af.mil; kenneth.schepler@wpafb.af.mil).

P. E. Powers is with the Department of Physics and the Electro-Optics Program, University of Dayton, Dayton, OH 45469 USA (e-mail: peter.powers@notes.udayton.edu).

Color versions of one or more of the figures in this paper are available online at <http://ieeexplore.ieee.org>.

Digital Object Identifier 10.1109/JSTQE.2008.2011285

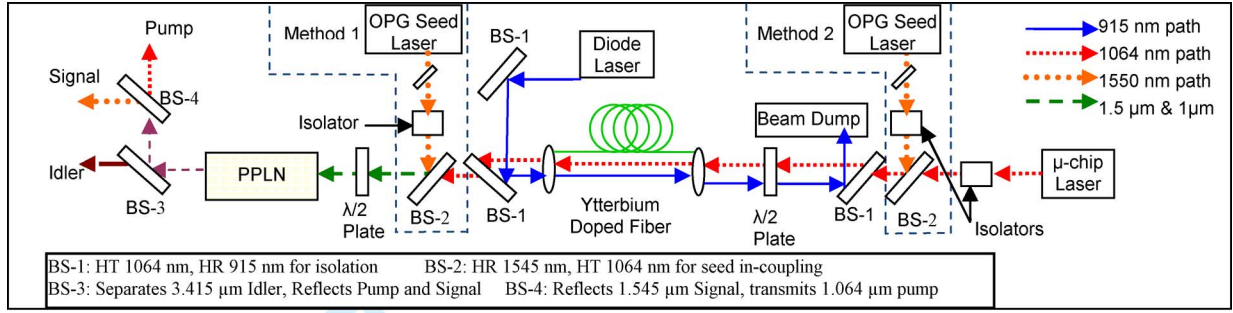


Fig. 1. Fiber amplifier pumped PPLN OPG setup—microchip oscillator laser pulses at 1064 nm are amplified in an Yb-doped, polarization maintaining fiber. The fiber amplifier is pumped by a 915 nm diode laser. Method 1: the fiber amplifier output is combined with the OPG seed beam and pumps a PPLN OPG. Method 2: the OPG seed beam couples into and is guided by the fiber amplifier.

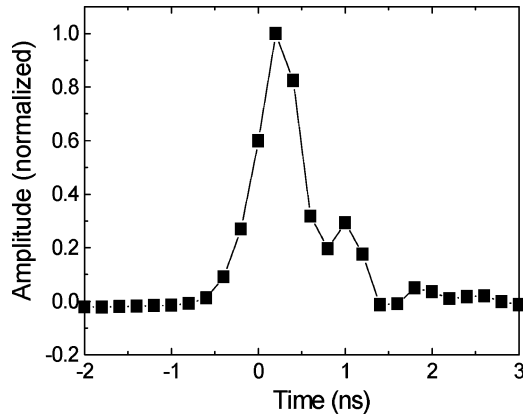


Fig. 2. Fiber amplifier output pulsewidth as measured by a LeCroy WaveRunner 204Xi oscilloscope.

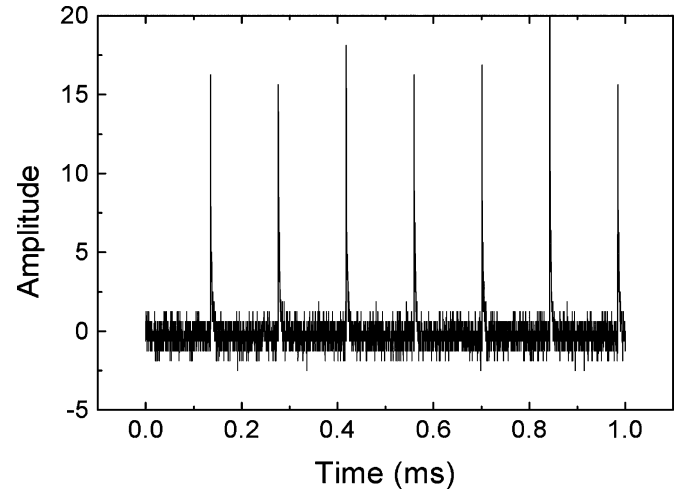


Fig. 3. Fiber amplifier output pulse train.

This reduced intensity at the end-cap surface to 50 MW/cm^2 , a factor of 425 below the damage threshold. A maximum output power of 710 mW was achieved at 6.5 W of pump power and 20 mW of microchip oscillator power coupled into the fiber. The fiber output pulsewidth was 0.5 ns, the same as the input laser pulsewidth. The 1064 nm fiber output beam quality was measured to be $M^2 = 1.5$ on the x -axis and $M^2 = 1.4$ on the y -axis. The fiber output pulsewidth of 0.5 ns and pulse train (7.14 kHz) are shown in Figs. 2 and 3, respectively. The pulse temporal profile was directly measured with a 2 GHz LeCroy WaveRunner 204Xi oscilloscope. The secondary pulse slightly delayed from the main pulse is a common effect in microchip lasers as observed by Schrader *et al.* [14].

The 1064 nm output of the fiber was loosely focused with the same lens used to mode-match the 915 nm pump laser into the fiber. A dichroic beam splitter was used to couple the 1064 nm amplified beam output and the 915 nm pump beam into the fiber amplifier. An 8.8 cm-focal-length lens was used to focus the 1064 nm beam to an $88 \mu\text{m}$ beam waist ($1/e$ field radius) 14 cm away from the lens where a PPLN crystal was mounted on a five-axis stage (three translations, rotation, and tilt). The beam waist was chosen to be $88 \mu\text{m}$ at the center of the crystal, near the optimum calculated by using the Rayleigh range criterion for maximum gain through the crystal. The PPLN crystal had a $1 \text{ mm} \times 14 \text{ mm}$ cross section and a 49 mm length along

the beam propagation direction. Multiple grating periods were poled into the crystal and it was uncoated with approximately parallel front and back surfaces. The domain grating period used was $30 \mu\text{m}$, which corresponds to expected $1.545 \mu\text{m}$ signal and $3.415 \mu\text{m}$ idler wavelengths based upon LiNbO_3 Sellmeier equations [15]. A half-wave plate was used to rotate the fiber laser output polarization to align with the z -axis in the PPLN crystal, hence maximizing nonlinear gain by employing the full magnitude of the d_{33} nonlinear component. The PPLN output was separated by two dichroic mirrors to isolate the signal and idler, as shown in Fig. 1.

III. PPLN OPG PERFORMANCE

A. OPG Unseeded Performance

Fig. 4 shows the average power of the signal and idler beams (and total power) with respect to fiber laser output power for unseeded operation—no change in signal or idler powers was observed when the system was seeded. Fig. 5 shows the total conversion efficiency with respect to fiber laser output power.

The nonseeded signal beam reached a maximum output of 107 mW ($15 \mu\text{J}$ per pulse) at a maximum fiber amplifier output of 635 mW, equivalent to 29% conversion efficiency, with a central wavelength of $1.545 \mu\text{m}$ and 3.6 nm full-width at

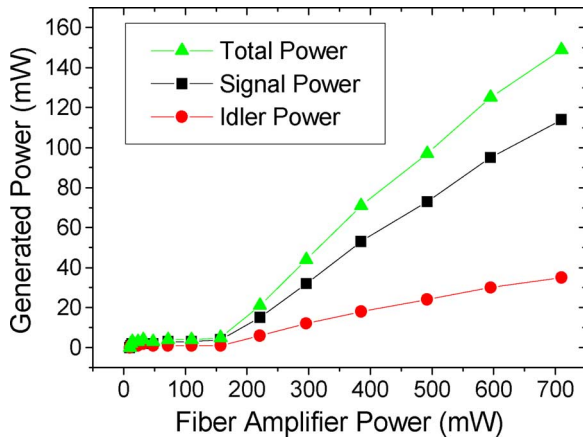


Fig. 4. Signal (1545 nm), idler (3418 nm), and total output power in a 1064 nm pumped, PPLN OPG (solid lines do not represent a physical model).

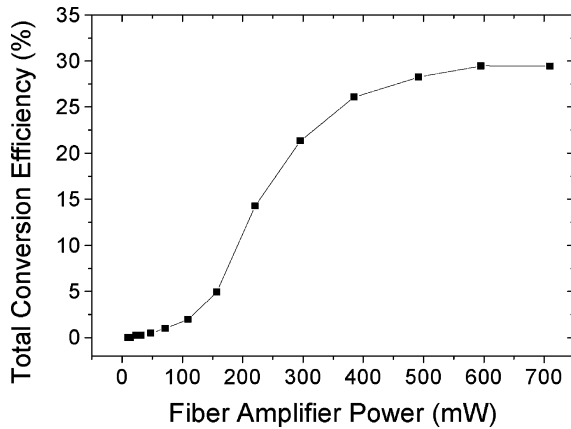


Fig. 5. Total conversion efficiency of pump laser power to OPG signal and idler wavelengths (solid lines do not represent a physical model).

half-maximum (FWHM) bandwidth, as measured by an Ando AQ-6315B optical spectrum analyzer (OSA) and shown in Fig. 6. The idler reached a maximum of 37 mW (5.2 μ J per pulse).

B. Seeded OPG Performance

A tunable diode laser with a measured bandwidth of 40 pm (monochromator resolution limit at 10 μ m slit widths verified by OSA) was used to seed the PPLN OPG process at the 1.5 μ m signal wavelength using two different methods. A 1.55 μ m isolator was used in both methods to prevent back reflections and a dichroic mirror was used to protect the diode seed laser from 1064 nm pulses, as shown in Fig. 1. The tunable diode laser power was measured at multiple operating currents and found to have consistent output power at all wavelengths for a given operating current.

In the first method of seeding (Method 1), the OPG seed beam was combined with the 1.064 μ m beam after the fiber amplifier output using a dichroic mirror, seeding the OPG with 1.5 mW of seed power. Lenses were used prior to combining the seed beam with the fiber amplifier output such that the seed beam would approximately focus to a 109 μ m waist at the center

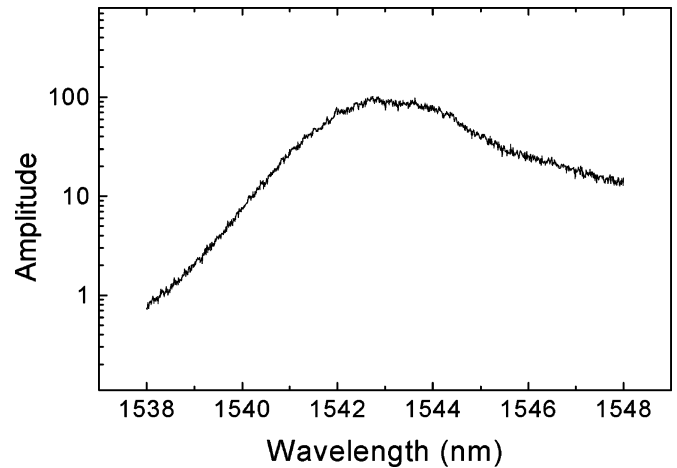


Fig. 6. Unseeded OPG signal spectrum.

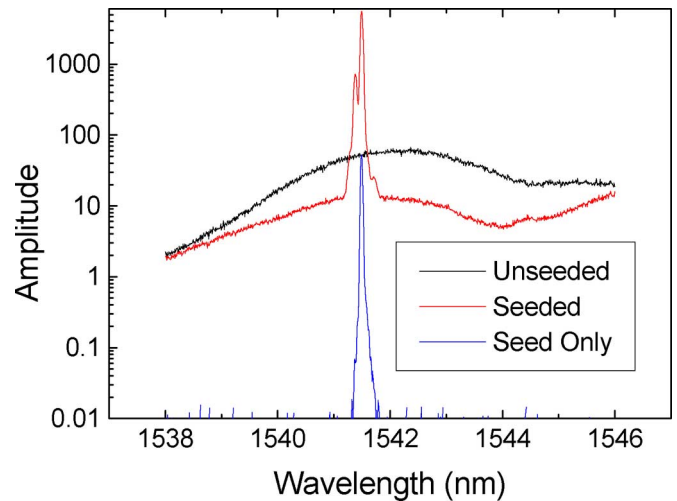


Fig. 7. Unseeded, seeded, and seed-only plots for Method 1 seeding at 4.75 W pump power applied to the fiber amplifier.

of the crystal, based on the Rayleigh range as had been done for the fiber amplifier output. Shown in Fig. 7 are the seeded, unseeded, and seed-only spectra using Method 1 seeding. Signal beam seeding using Method 1 successfully achieved narrow-bandwidth operation for all fiber amplifier pump powers above 3.5 W and over a seed beam range of 1.540–1.546 μ m, as shown in Fig. 8, with an optimal seed wavelength of 1.5435 μ m resulting in a bandwidth of 0.055 nm, a bandwidth reduction factor of 65. We note that this bandwidth is within an order of magnitude of the transform limit (7 pm or 0.9 GHz) for a 0.5 ns pulse. Shown in Fig. 9 is the seeding effectiveness measured as the fraction of signal energy in the seeded peak compared to the total signal energy. For Method 1 seeding, the minimum signal seed power required to achieve successful seeding was 130 μ W, where successful seeding is defined by the seeded spectrum baseline being attenuated 3 dB below the unseeded spectrum.

For Method 2 seeding, the OPG seed was focused into the input end of the amplifier fiber and guided by the fiber, thus achieving automatic coalignment with the 1064 nm oscillator beam in the OPG crystal. Efficient coupling of the seed beam

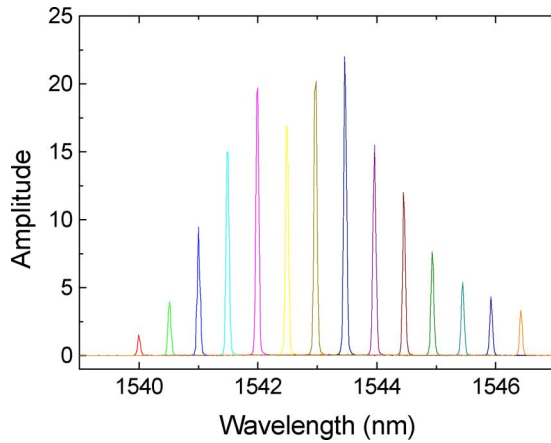


Fig. 8. Wavelength tunability for Method 1 seeding.

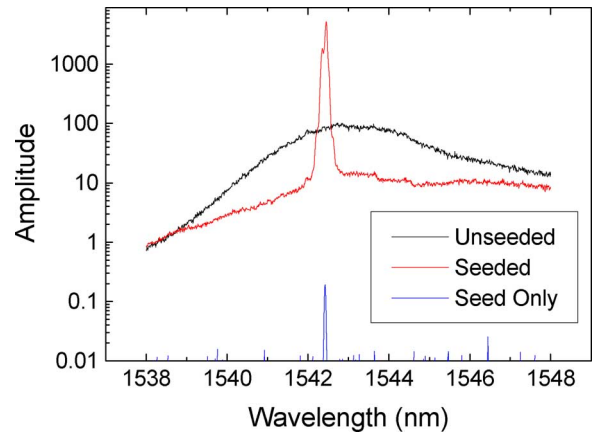


Fig. 10. Unseeded, seeded, and seed-only plot for Method 2 seeding with 4.75 W pump power applied to the fiber amplifier.

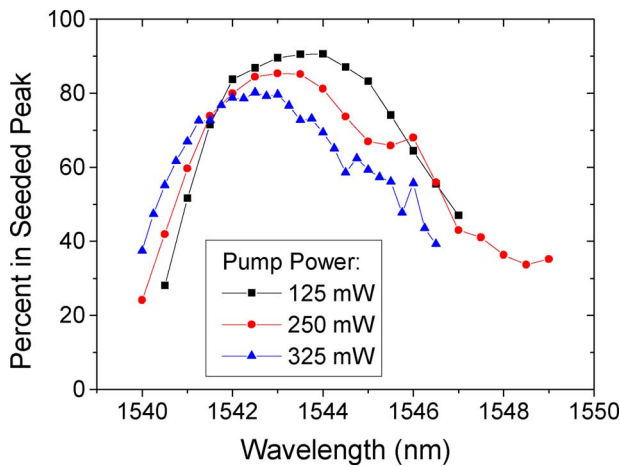


Fig. 9. OPG seeding effectiveness with seed wavelength tuning and changes in 1064 nm pump power for Method 1 seeding.

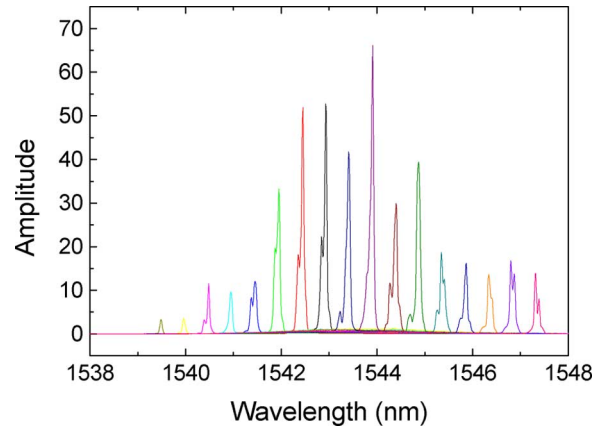


Fig. 11. Wavelength tunability of Method 2 seeding.

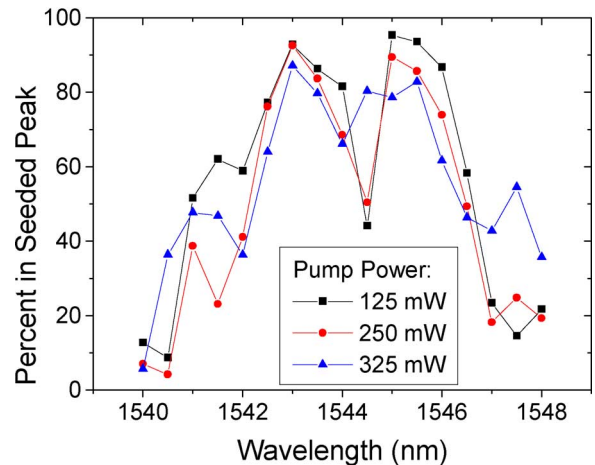


Fig. 12. Seeding effectiveness with seed wavelength tuning and changes in 1064 nm pump power for Method 2 seeding.

into the fiber core proved to be difficult. We noted significant seed beam in the cladding as well as in the core of the amplifier fiber. This may have been caused by seed beam polarization components not parallel to the required polarization orientation of the PM fiber, as the $1.54 \mu\text{m}$ seed beam passed through a half-wave plate designed for $1.064 \mu\text{m}$. Seed power of $60 \mu\text{W}$ was incident on the OPG crystal. Fig. 10 shows the seed beam, unseeded spectrum, and seeded spectrum—note that the seed beam is significantly weaker than as measured in Method 1. Guiding the seed beam through the fiber successfully seeded at a seed wavelength range of $1.541\text{--}1.547 \mu\text{m}$; wavelength tunability is shown in Fig. 11. The seeded beam bandwidth was measured to be 0.055 nm , a factor of 65 reduction from the 3.6 nm unseeded spectrum. Ideal seeding occurred at a seed wavelength of $1.543 \mu\text{m}$, with a minimum power of $30 \mu\text{W}$ required for successful seeding. Shown in Fig. 12 is a comparison of the percentage of total signal energy in the seeded peak versus the seed wavelength, all measured with maximum seed power.

IV. CONCLUSION

We have successfully seeded narrow-band OPG in a PPLN crystal pumped by 0.5 ns pulses generated in a fiber amplifier by introducing a $1.5 \mu\text{m}$ seed beam between the fiber amplifier output and the PPLN crystal and by guiding the seed beam through

the fiber amplifier. The polarization maintaining Yb fiber amplifier generated 710 mW of average pump power from 20 mW of injected pulses produced by a microchip laser. OPG signal beam conversion efficiencies as high as 29% were achieved. The relatively large unseeded 3.6 nm OPG signal bandwidth was improved to 55 pm with seeding.

Method 1 seeding after the fiber is reliable, the amount of energy in the seeded peak is very consistent across the signal spectrum, and is optimal for providing maximum seed beam power to the crystal. However, Method 1 requires optics to guide and coalign the seed beam with the PPLN pump beam (in our case, the fiber amplifier output), which can attenuate the PPLN pump. With Method 2 seeding before the fiber, the seed beam is automatically aligned with the fiber amplifier output, though coupling the seed beam into the fiber amplifier required as many optics as coalignment in Method 1. Additionally, Method 2 seeding displayed an unexpected amount of variation in seeding efficiency over the unseeded signal spectrum. This could be a result of destructive interference, losses at particular wavelengths as a result of fiber spooling, or nonoptimal coupling into the fiber core.

Performance factors between Method 1 and Method 2 are similar—bandwidth reduction, seed wavelength tunability, and the amount of energy in the seeded peak—though Method 1 is slightly superior. Method 1 is simpler to introduce after a system has been established, but Method 2 is automatically perfectly aligned with the fiber output.

The device was simple to align and quite stable during operation. The complete device could easily be packaged into a rugged device ideal for eyesafe, high-resolution laser ranging, and remote sensing.

ACKNOWLEDGMENT

The authors thank I. T. Lima for many helpful discussions.

REFERENCES

- [1] L. E. Myers, R. C. Eckardt, M. M. Fejer, R. L. Byer, W. R. Bosenberg, and J. W. Pierce, "Quasi-phase-matched optical parametric oscillators in bulk periodically poled LiNbO₃," *J. Opt. Soc. Amer. B*, vol. 12, pp. 2102–2116, 1995.
- [2] U. Baeder, J.-P. Meyn, J. Bartschke, T. Weber, A. Borsutzky, R. Wallenstein, R. G. Batchko, M. M. Fejer, and R. L. Byer, "Nanosecond periodically poled lithium niobate optical parametric generator pumped at 532 nm by a single-frequency passively Q-switched Nd:YAG laser," *Opt. Lett.*, vol. 24, pp. 1608–1610, 1999.
- [3] J. J. Zayhowski, "Periodically poled lithium niobate optical parametric amplifiers pumped by high-power passively Q-switched microchip lasers," *Opt. Lett.*, vol. 22, pp. 169–171, 1997.
- [4] B.-G. Zhang, J.-Q. Yao, X. Ding, H. Zhang, P. Wang, D.-G. Xu, G.-J. Yu, and F. Zhang, "Low-threshold, high-efficiency, high-repetition-rate optical parametric generator based on periodically poled LiNbO₃," *Chin. Phys.*, vol. 13, pp. 364–368, 2004.
- [5] P. E. Powers, T. J. Kulp, and S. E. Bisson, "Continuous tuning of a continuous-wave periodically poled lithium niobate optical parametric oscillator by use of a fan-out grating design," *Opt. Lett.*, vol. 23, pp. 159–161, 1998.
- [6] K. W. Aniolek, R. L. Schmitt, T. J. Kulp, B. R. Richman, S. E. Bisson, and P. E. Powers, "Microlaser-pumped periodically poled lithium niobate optical parametric generator optical parametric amplifier," *Opt. Lett.*, vol. 25, pp. 557–559, 2000.
- [7] P. E. Britton, H. L. Offerhaus, D. J. Richardson, P. G. R. Smith, G. W. Ross, and D. C. Hanna, "Parametric oscillator directly pumped by a 1.55- μ m erbium-fiber laser," *Opt. Lett.*, vol. 24, pp. 975–977, 1999.
- [8] A. Galvanauskas, M. A. Arbore, M. M. Fejer, M. E. Fermann, and D. J. Harter, "Fiber-laser-based femtosecond parametric generator in bulk periodically poled LiNbO₃," *Opt. Lett.*, vol. 22, pp. 105–107, 1997.
- [9] R. Paschotta, J. Nilsson, A. C. Tropper, and D. C. Hanna, "Ytterbium-doped fiber amplifiers," *IEEE J. Quantum Electron.*, vol. 33, pp. 1049–1056, 1997.
- [10] H. M. Pask, R. J. Carman, D. C. Hanna, A. C. Tropper, C. J. Mackechnie, P. R. Barber, and J. M. Dawes, "Ytterbium-doped silica fiber lasers: Versatile sources for the 1–1.2 μ m region," *IEEE J. Quantum Electron.*, vol. 1, pp. 2–13, 1995.
- [11] M. D. Cocuzzi, K. L. Schepler, P. E. Powers, and I. T. Lima, "Subnanosecond infrared optical parametric pulse generation in PPLN pumped by a seeded fiber amplifier," in *Advanced Solid-State Photonics*. Nara, Japan: Opt. Soc. Amer., 2008.
- [12] C. C. Renaud, J. A. Alvarez-Chavez, J. K. Sahu, J. Nilsson, D. J. Richardson, and W. A. Clarkson, "7.7 mJ pulses from a large core Yb-doped cladding pumped Q-switched fiber laser," in *OSA Summaries of papers presented at the Conf. Lasers and Electro-Opt. (CLEO 2001)*, Tech. Dig., Postconference Ed., 2001, p. 219.
- [13] J. Limpert, S. Hofer, A. Liem, H. Zellmer, A. Tunnermann, S. Knoke, and H. Voelckel, "100-W average-power, high-energy nanosecond fiber amplifier," *Appl. Phys. B*, vol. 75, pp. 477–479, 2002.
- [14] P. E. Schrader, R. L. Farrow, D. A. V. Kliner, J.-P. Feve, and N. Landru, "Fiber-based laser with tunable repetition rate, fixed pulse duration, and multiple wavelength output," *Proc. SPIE*, vol. 6453, p. 64530D, 2007, DOI:10.1117/12.701529.
- [15] D. E. Zelmon, D. L. Small, and D. Jundt, "Infrared corrected Sellmeier coefficients for congruently grown lithium niobate and 5 mol.% magnesium oxide-doped lithium niobate," *J. Opt. Soc. Amer. B*, vol. 14, pp. 3319–3322, 1997.

Matthew D. Cocuzzi was born in Columbus, OH. He received the Bachelor's degree in electrical engineering and the M.S. degree in electro-optics from the University of Dayton, Dayton, OH, in 2005 and 2007, respectively.

He was a graduate student under the Student Career Experience Program for the Air Force Research Laboratory Sensors Directorate for two years, where he became an Associate Electronics Engineer. He is currently with the Air Force Research Laboratory, Wright-Patterson Air Force Base (WPAFB), OH.

Kenneth L. Schepler was born in Clinton, IA. He received the B.S. degree in physics from Michigan State University, East Lansing, in 1971, and the Ph.D. degree in physics from the University of Michigan, Ann Arbor, in 1975.

He was in the Air Force for six years. In 1981, he joined the Avionics Laboratory as a civilian at Wright-Patterson Air Force Base, OH, where he is currently a Principal Scientist with the Sensors Directorate of the Air Force Research Laboratory. His current research interests include solid-state laser physics, laser materials spectroscopy, and nonlinear frequency conversion.

Dr. Schepler is a Fellow of the Optical Society of America and a member of the American Physical Society.

Peter E. Powers was born in Atlanta, GA. He received the B.Sc. degree from Massachusetts Institute of Technology, Cambridge, in 1988, and the M.Sc. and Ph.D. degrees in applied and engineering physics from Cornell University, Ithaca, NY, in 1990 and 1995, respectively.

From 1995 to 1997, he was a Postdoctoral Research Associate at Sandia National Laboratories. Since 1997, he has been with the Department of Physics and Electro-Optics Program, University of Dayton, Dayton, OH, where he is currently a Professor of physics. His current research interests include nonlinear optics.

Dr. Powers is a member of the Optical Society of America.